
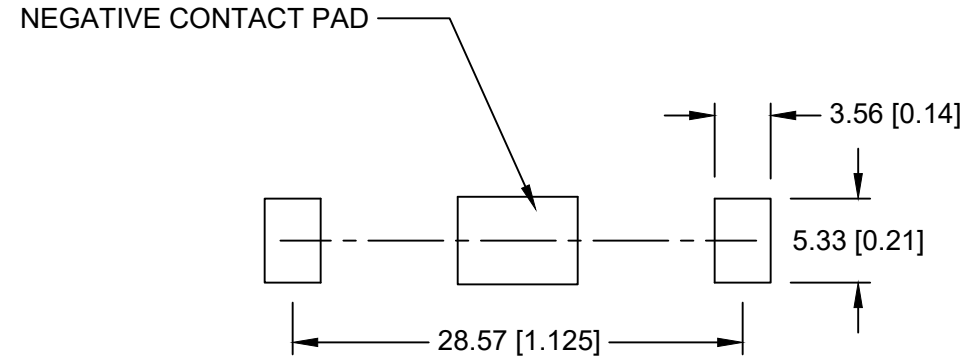
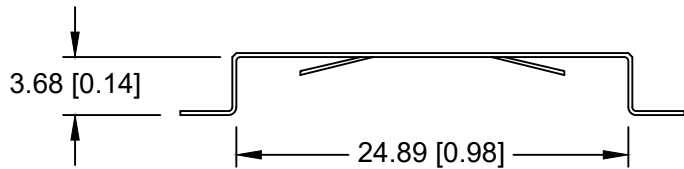



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
12/11/15	A	Removed Dim. 1.40 Updated to ROHS 2 Complaint	T.B.	B.S.	
04/06/18	B	Updated shape of positive contact tabs	T.B.	B.S.	
03/26/19	C	Dim. 9.53 was 8.26	T.B.	B.S.	
04/05/19	D	Updated notes	T.B.	B.S.	

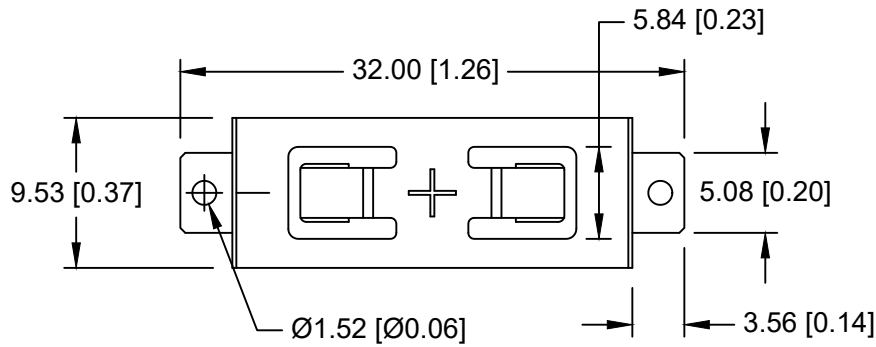

PCB LAYOUT

NOTES:

- \* Material- 0.25mm Phosphor Bronze, Nickel plated.
- \* Vibration test: 10-50-10 hz swept in 60 seconds  
x,y,z direction: 1 hour each direction
- \* Result: no dislodgement of the cell or damage  
no discontinuity over 10 micro-seconds
- \* Shock test: half sine wave acceleration 150g.  
6 ms 1 shock pulses each direction per axis
- \* Result: no evidence of physical damage
- \* Drop Test: Mounted on board and dropped 1 time per direction  
from 1m high to wooden floor
- \* Result: No dislodgement of the cell, No damage to the holders
- \* Approximate weight: 0.48g
- \* ROHS COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal ±.5 (.020)	Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title CR2430 BATTERY STRAP, SMT		
Angular ± 3°	Date 04/05/19	Drawing Number BC-2013	