

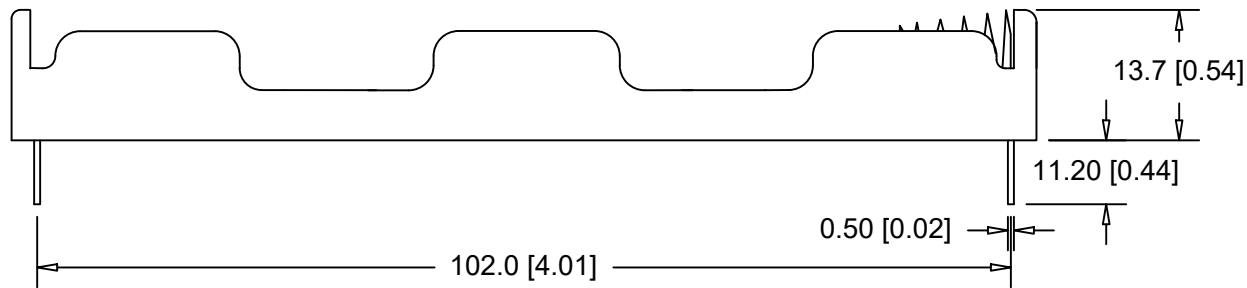



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
10/30/15	E	DIM. 102.0 WAS 104.0 DIM. 16.2 WAS 16.0	T.B.	B.S.	
04/21/17	F	DIM. 107.8 WAS 108.0 DIM. 49.7 WAS 50.2	T.B.	B.S.	
03/07/19	G	UPDATED TO "ROHS COMPLIANT"	T.B.	B.S.	

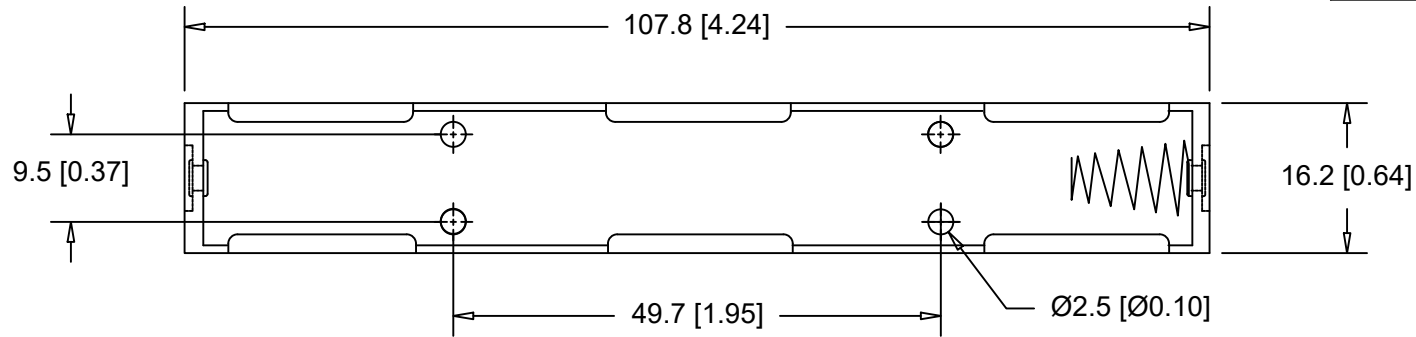

SPECIFICATIONS:

Plastic material - polypropylene, PP-1040
 Flammability rating-UL94 HB, UL file no. E216959
 Temperature Range: -10°C to +100°C
 Springs - nickel plated steel spring
 Rivets - Brass, nickel plated
 P.C. Pins - Steel, nickel plated
 Contact resistance: Under 50mΩ for +/- contacts per EIA-540J000
 ROHS COMPLAINT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S.
Fractional ± .8 (.030)	Title TWO "AA" CELL HOLDER WITH PC PINS		
Angular ± 3°	Date 03/07/19	Drawing Number BC12AAPC	
		Approved By T.B.	