



Date	SYM	REVISION RECORD	AUTH	DR.	CK.

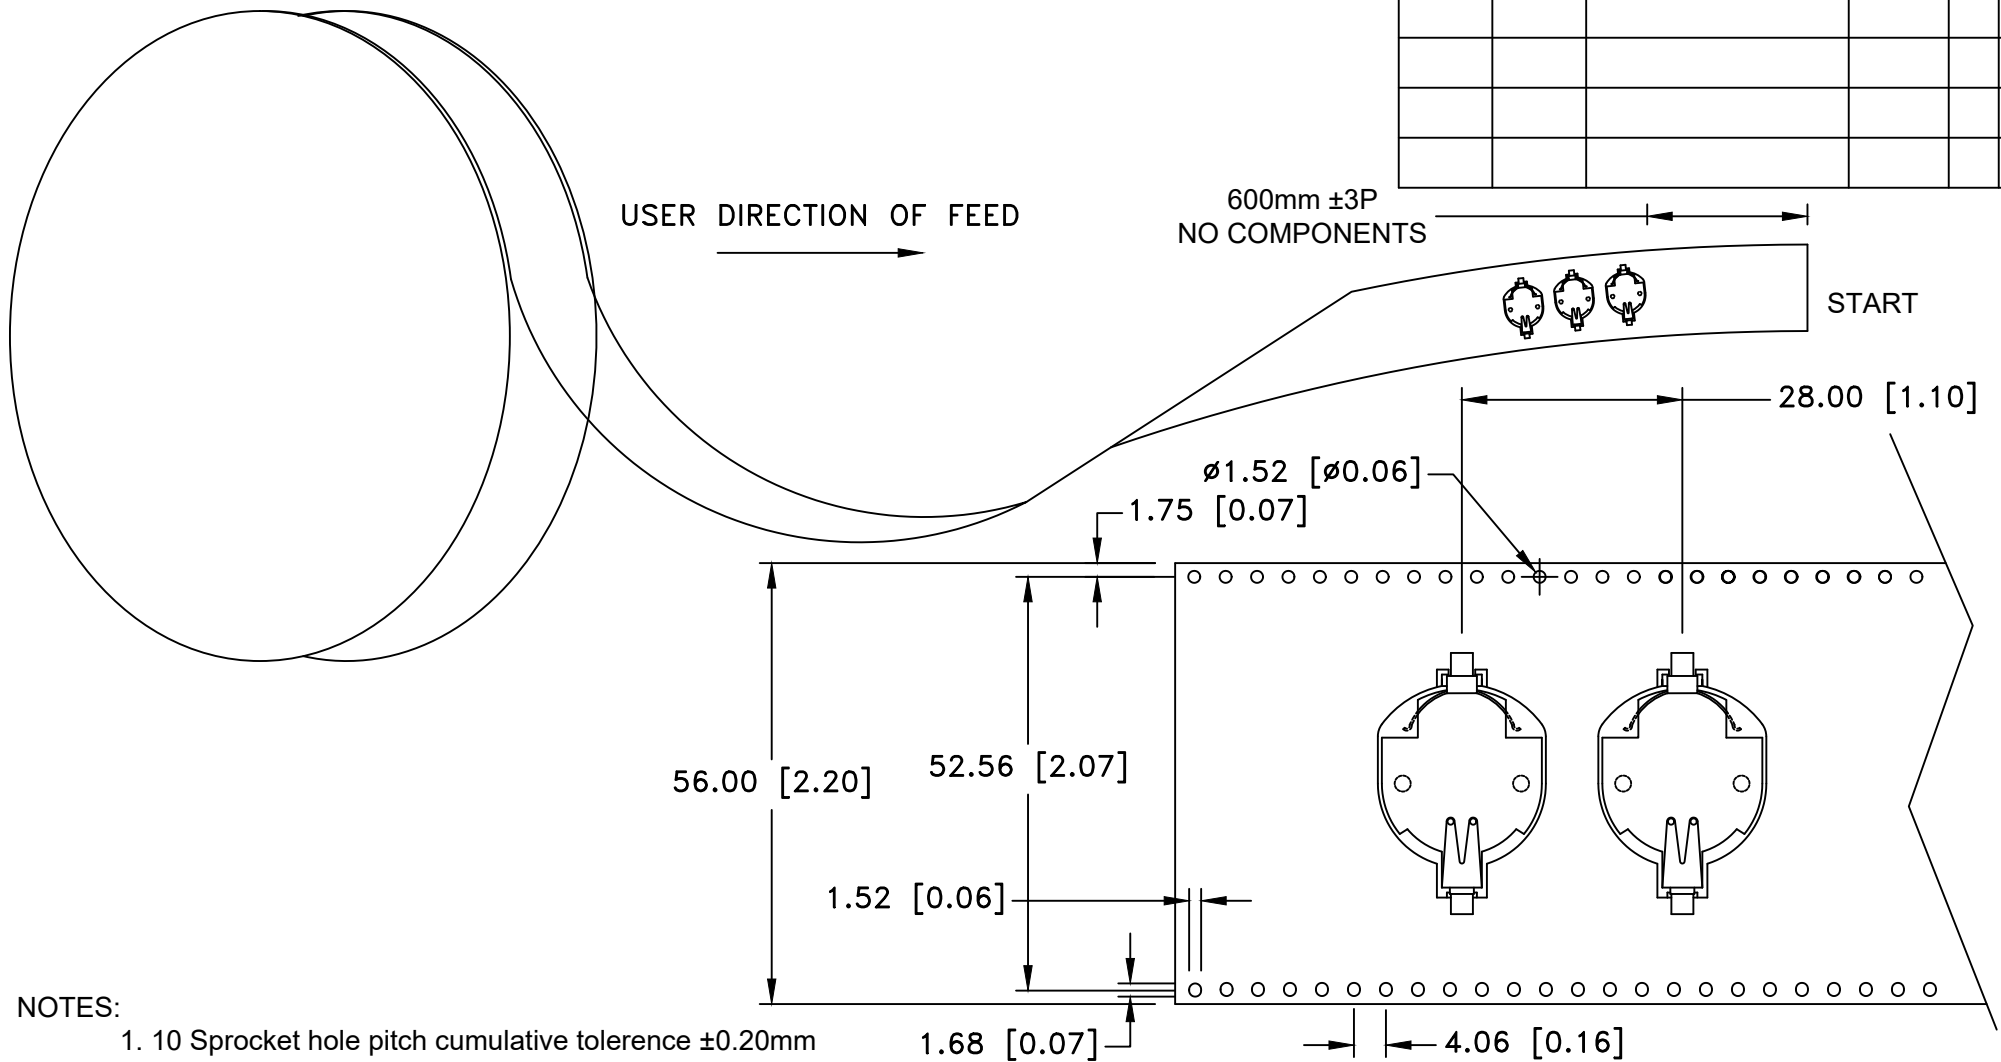

- NOTES:
1. 10 Sprocket hole pitch cumulative tolerance  $\pm 0.20\text{mm}$
  2. Carrier camber not to exceed 1mm in 250mm
  3. Material: Transparent Anti-static Polystyrene
  4. Thickness:  $0.35 \pm 0.05\text{mm}$
  5. Component loader per 13" reel: 380 Pcs.
  6. All dimensions per EIA-481-2A

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735	
$\pm .5$ (.020)		Drawn By B.S.
Fractional	Title TAPE AND REEL SPECIFICATION FOR	
$\pm .8$ (.030)	SURFACE MOUNT BATTERY HOLDER FOR BRX1-2450	
Angular	Date	Drawing Number
$\pm 3^\circ$	01/21/21	BC2032-F1-TR-99
		Approved By T.B.