



| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|------|-----|-----------------|------|-----|-----|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

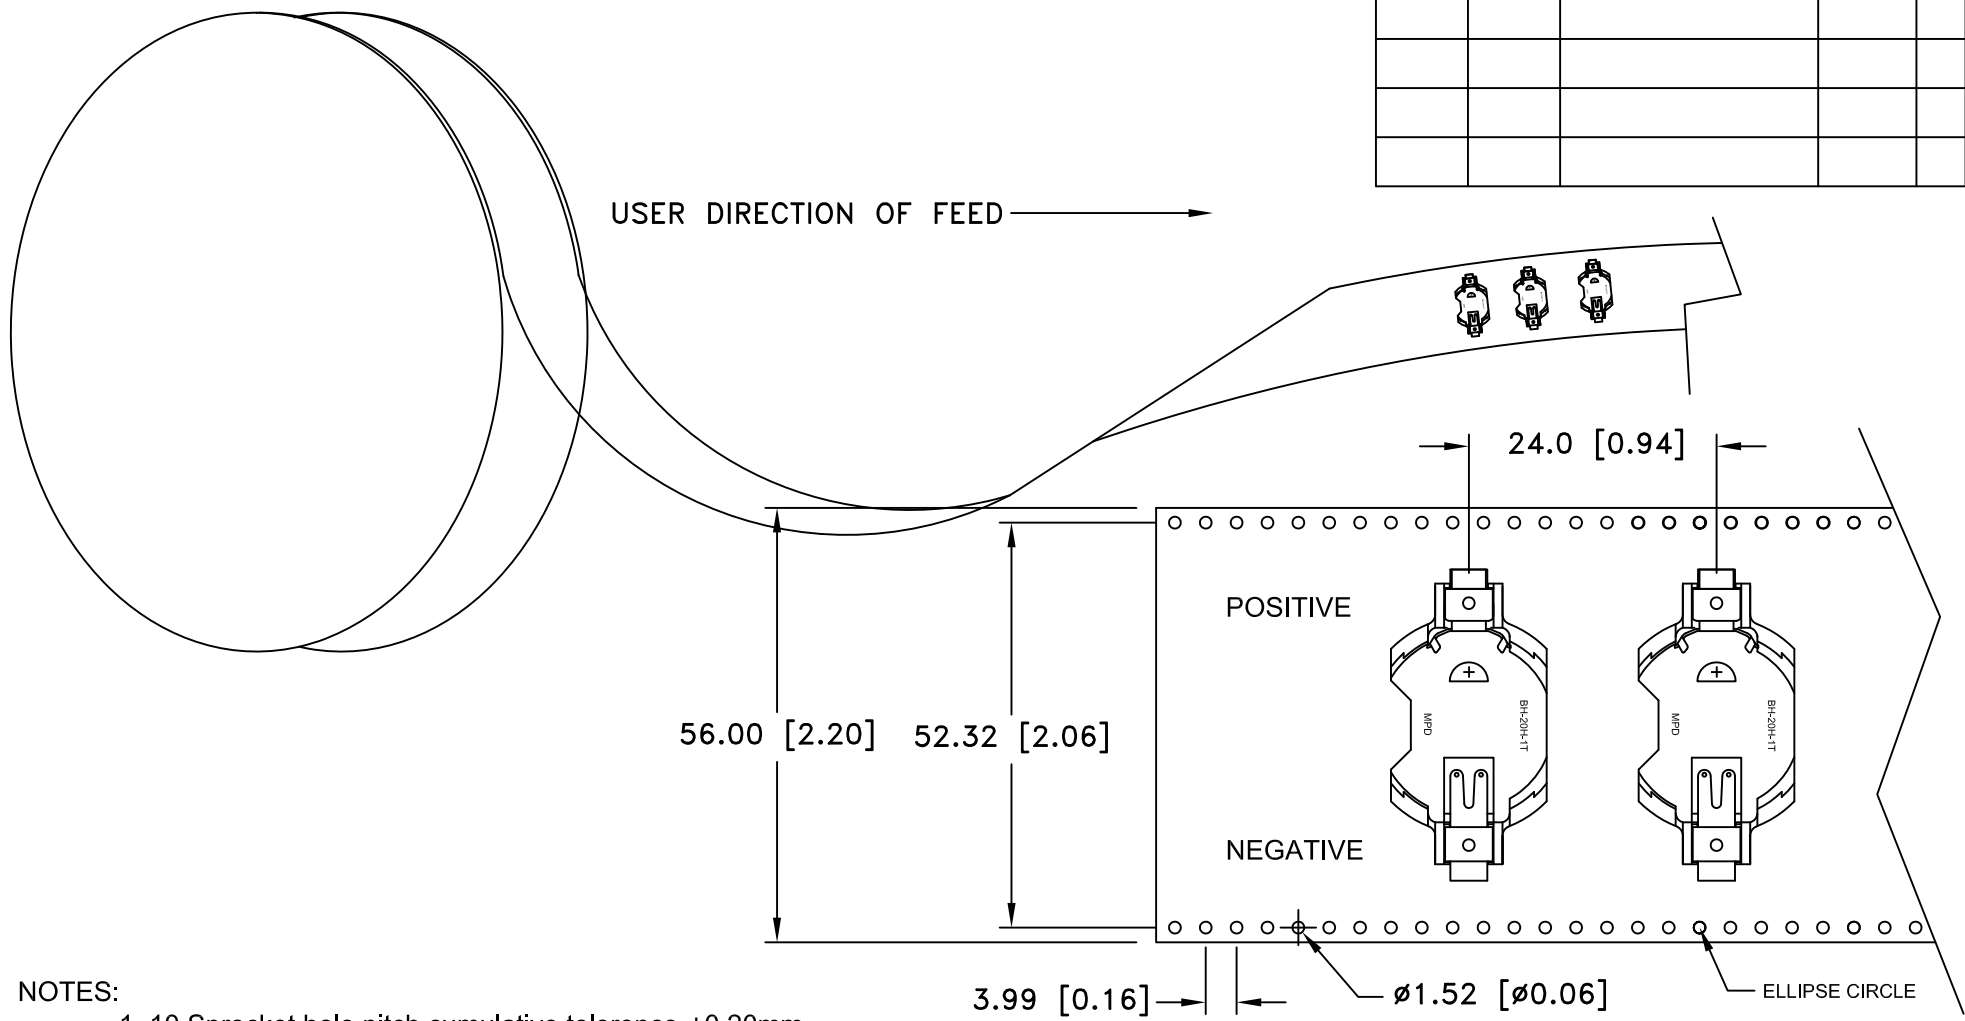

- NOTES:
1. 10 Sprocket hole pitch cumulative tolerance ± 0.20 mm
 2. Carrier camber not to exceed 1mm in 250mm
 3. Material: Transparent Anti-static Polystyrene
 4. Thickness: 0.35 ± 0.05 mm
 5. Component loader per 13" reel: 400 pcs
 6. All dimensions per EIA-481

| | | | |
|--------------------------------|---|----------|------------------|
| Tolerance (Except as noted) |  Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 | Scale | Drawn By B.S. |
| | | | Approved By T.B. |
| decimal $\pm .5$ (.020) | Title TAPE AND REEL SPECIFICATION FOR SURFACE MOUNT BATTERY HOLDER FOR CR2032 | Date | |
| Fractional $\pm .8$ (.030) | | 06/10/11 | |
| Angular $\pm 3^\circ$ | Drawing Number | | BH-20H-1T-99 |