


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
03/03/17	C	DIM. 3.50 WAS 3.18	T.B.	B.S.	
04/07/17	D	UPDATED MOUNTING INSTRUCTION	T.B.	B.S.	
04/14/17	E	DIM. 3.18 WAS 3.50	T.B.	B.S.	
05/05/17	F	DIM. 3.40 WAS 3.18 DIM. 4.70 WAS 5.33	T.B.	B.S.	

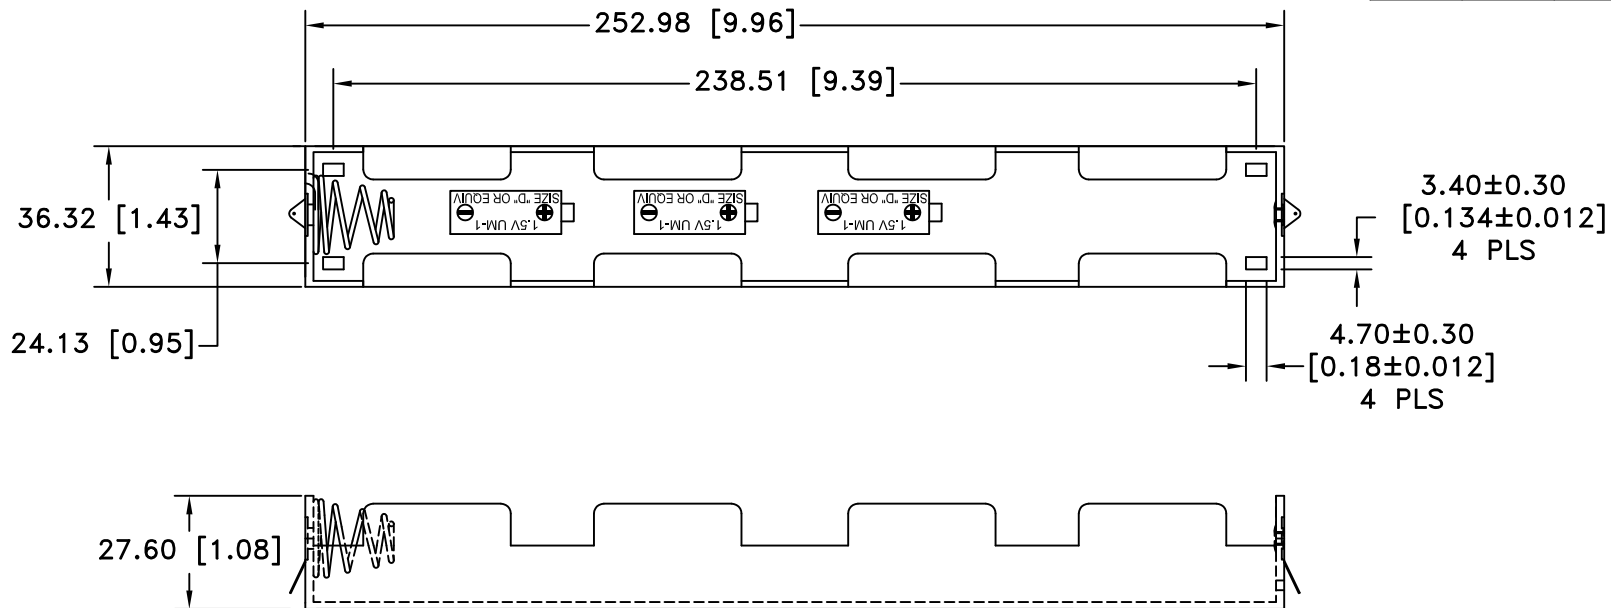

NOTES:


SPECIFICATION:

1. MATERIAL:

- HOUSING : BLACK POLYPROPYLENE
- FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959
- TEMPERATURE RANGE: -10°C to +100°C
- RIVETS: BRASS, NICKEL PLATED.
- SPRING: SPRING STEEL, NICKEL PLATED.
- LUGS: BRASS, NICKEL PLATED
- CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000
- ROHS 2 COMPLIANT

MOUNTING INSTRUCTION:

- USE 6-32 MACHINE SCREWS.
- ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title 4 "D" CELL HOLDER WITH SOLDER LUGS		
Fractional ± .8 (.030)		Date 05/05/17	Drawing Number BH14DL
Angular ± 3°			