



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
05/25/18	A	Added Dim. 0.30	T.B.	B.S.	
06/01/18	B	Updated Material Specification	T.B.	B.S.	
12/12/19	C	Added weight of the part	T.B.	B.S.	

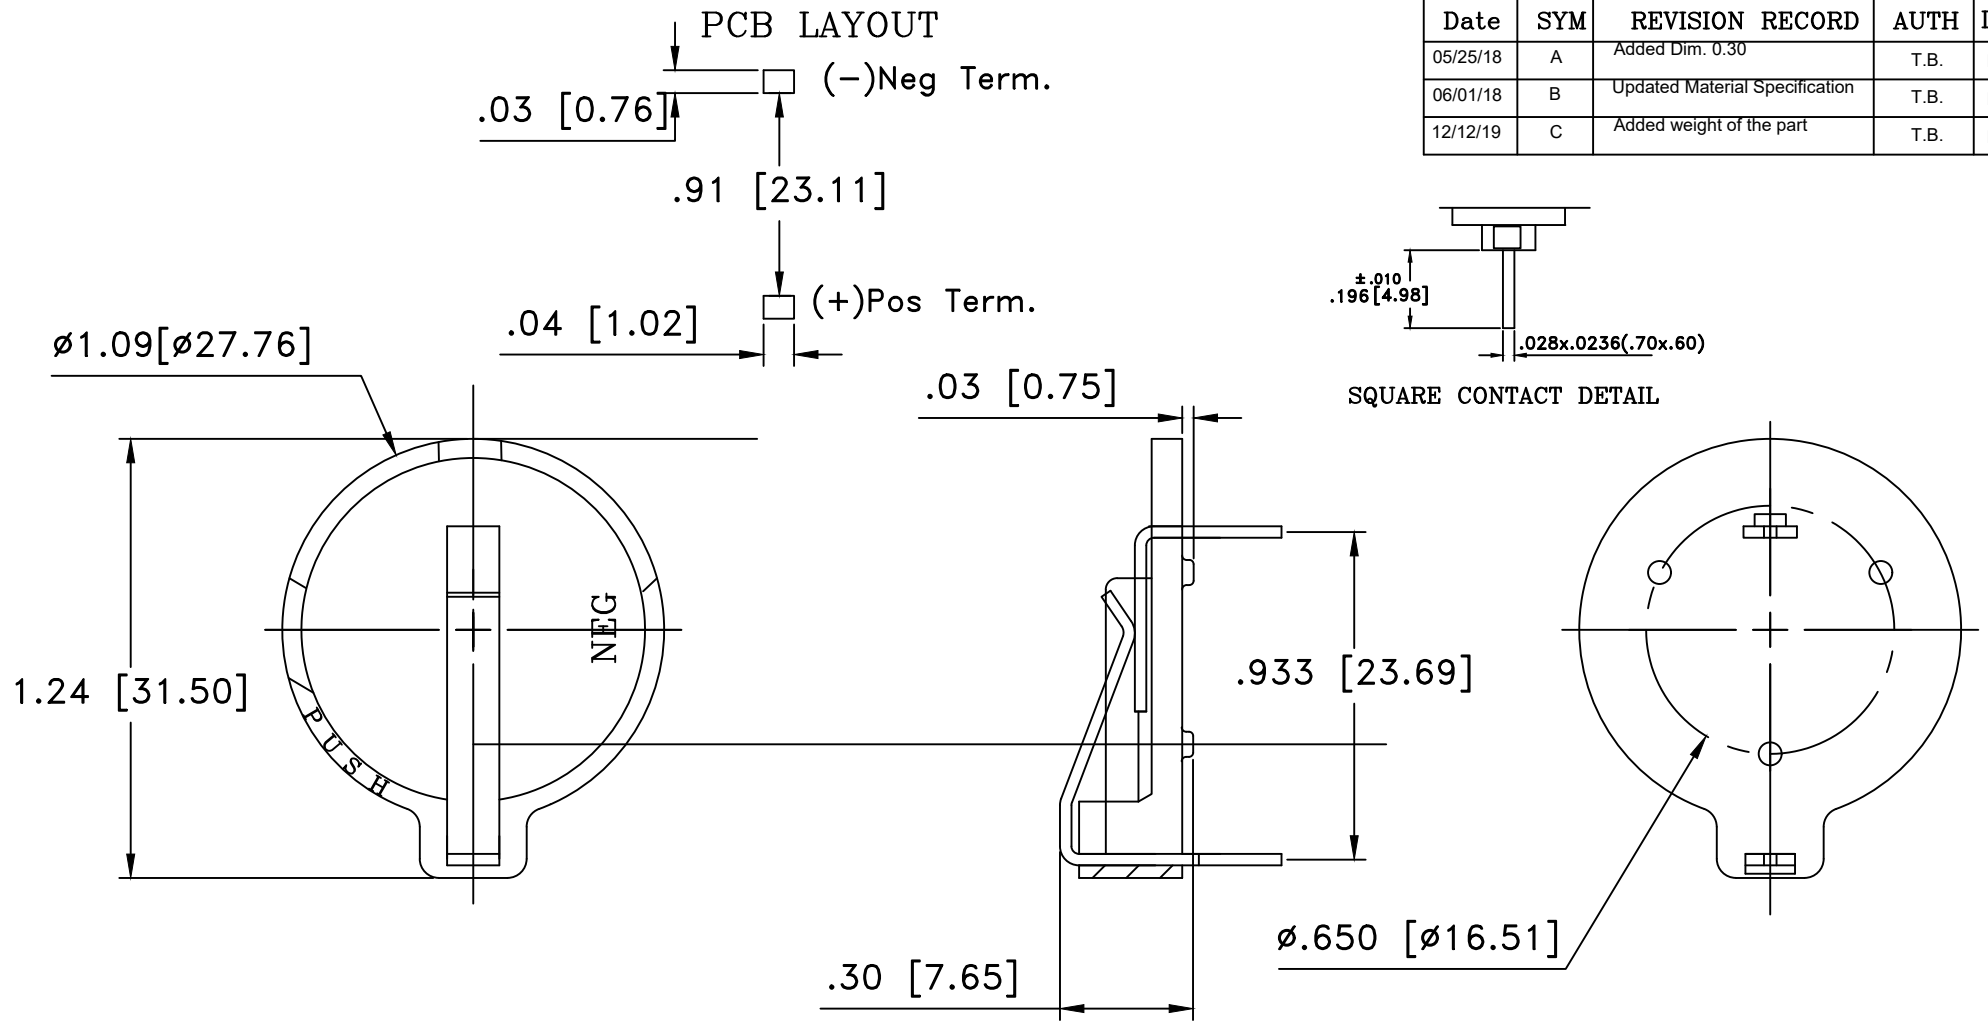

SPECIFICATIONS

- *Holder material- LCP 30% GLASS REINFORCED RESIN
- *Flammability rating-UL94V-0, FILE NO. E344082
- *Contacts :
 - Positive: 0.0236" thick PHOS-BRONZE, Nickel Pltd.
 - Negative: 0.0236" thick spring tempered Stainless Steel, Nickel Pltd.
- *Temperature Range: -40°C to +140°C
- Approximate weight: 2.33g
- ROHS COMPLIANT

Tolerance (Except as noted)	 Memory protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S.
Fractional ± .8 (.030)	Title CR2450 BATTERY HOLDER, THRU HOLE		
Angular ± 3°	Date 12/12/19	Drawing Number BH2450T-C	
Approved By T.B.			