
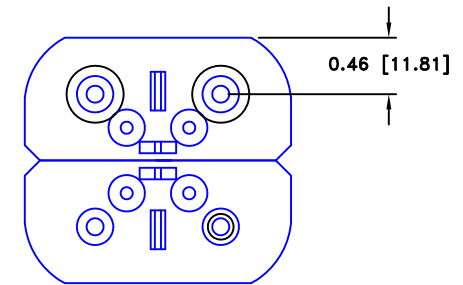
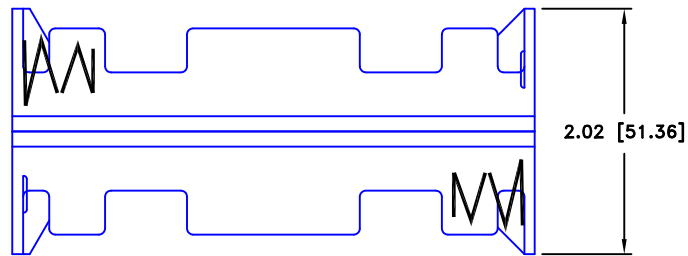



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
3/18/06	B	UPDATED MATERIAL SPEC.	T.B.	B.S.	
4/29/06	C	ADDED CONTACT RESI. INFO.	T.B.	B.S.	
3/10/07	D	ADDED DIM. 0.46 [11.81]	T.B.	B.S.	
3/18/07	E	ADDED DIM. 0.59 [15.06]	T.B.	B.S.	
8/06/14	F	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	

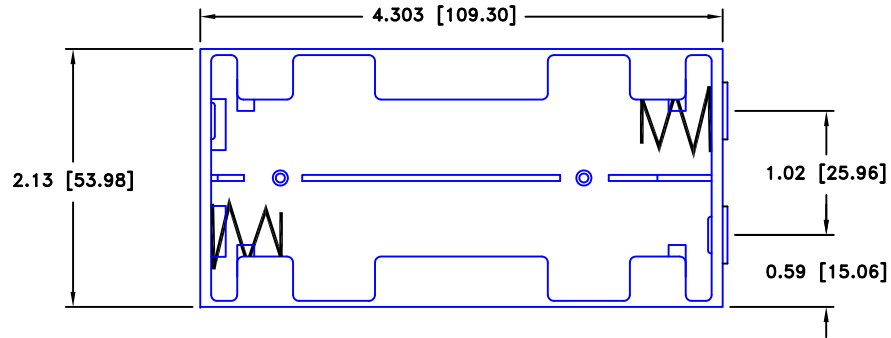

SPECIFICATIONS

Plastic material- polypropylene
 Flammability Rating -UL94-HB, UL File NO. E216959
 Temperature Range: -10°C to +100°C
 Springs- nickel plated spring steel
 Rivets- Brass, nickel plated
 Contact Resistance: Under 50mΩ for +/- contacts per
 EIA-540J000

ROHS 2 COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.020 (.5)	Scale 1=1	Drawn By T.S. Approved By T.B.	
Fractional ± .030 (.8)	Title EIGHT "C" CELL HOLDER WITH BUMP PLATES		
Angular ± 3°	Date 8/06/14	Drawing Number BH28CB	