


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
03/03/17	E	DIM. 200.50 WAS 201.78 DIM. 29.3 WAS 29.0 DIM. 73.8 WAS 73.0 DIM. 5.0 WAS 3.18 DIM. 150.0 WAS 152.4	T.B.	B.S.	
03/17/17	F	ADDED SIDE VIEW	T.B.	B.S.	
03/31/17	G	ADDED DIM. Ø4.00	T.B.	B.S.	

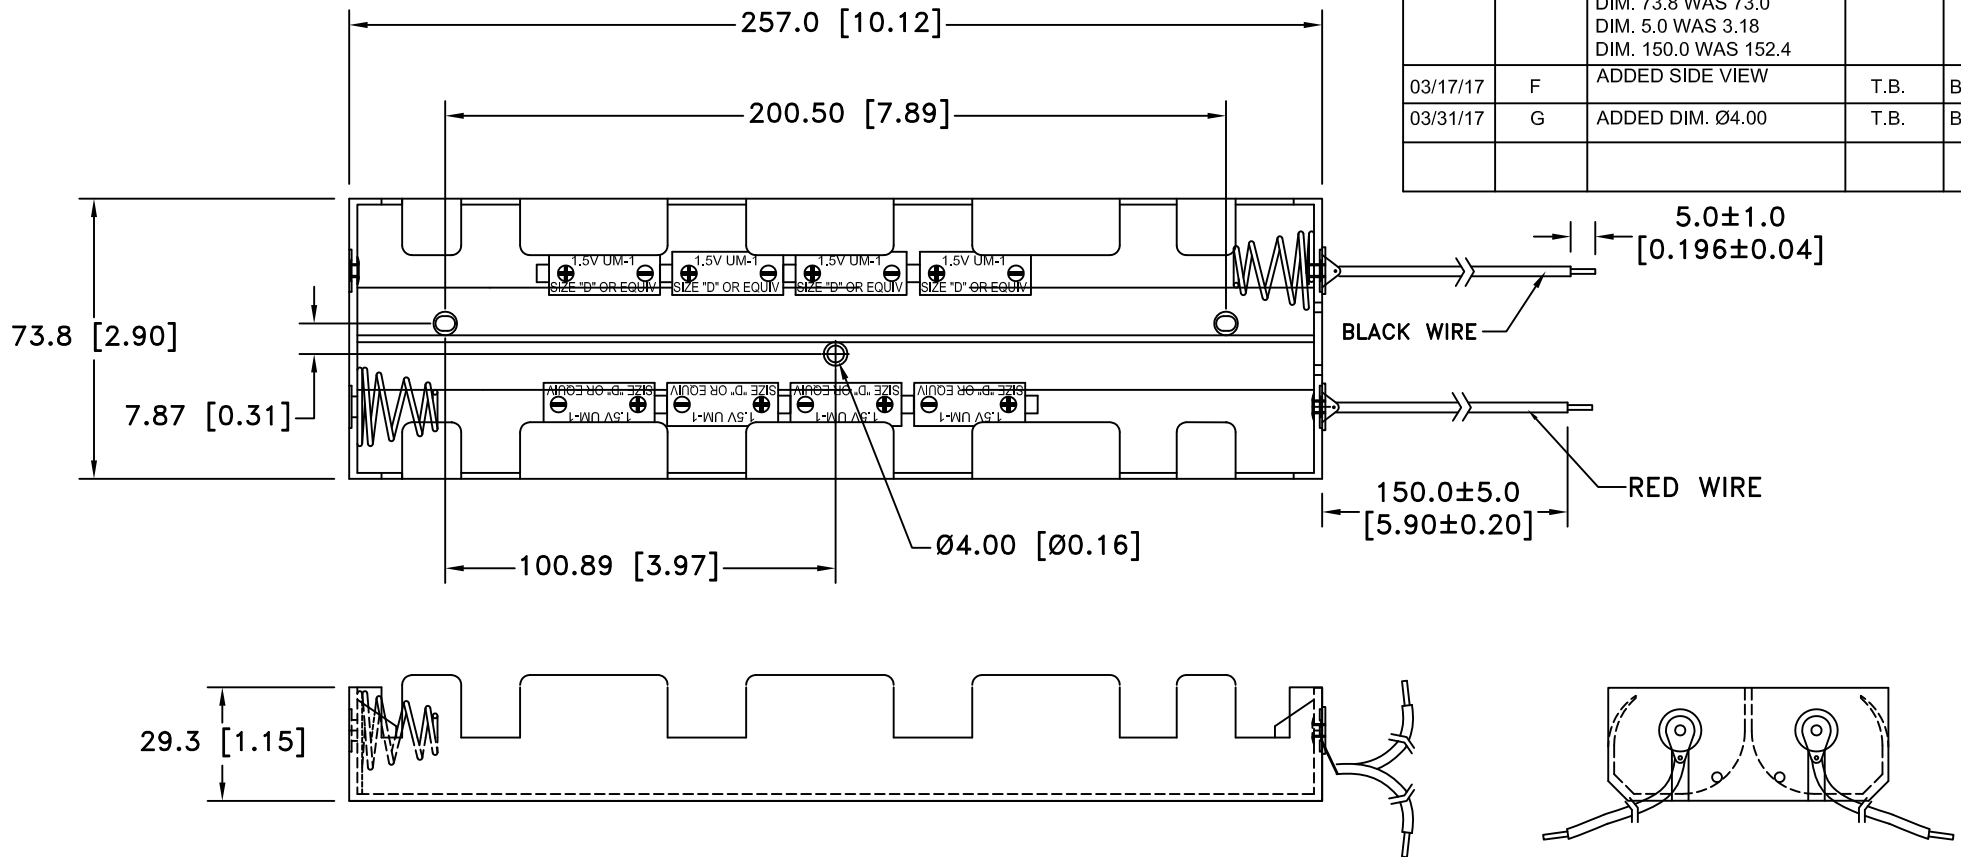


SPECIFICATION:

1. MATERIAL:

HOUSING : BLACK POLYPROPYLENE
 FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959
 TEMPERATURE RANGE: -10°C to +100°C
 RIVETS: BRASS, NICKLE PLTD.
 WIRE: 26 AWG, UL1007, CSA, TR64, 300V, 80°C
 SPRING: SPRING STEEL, NICKLE PLTD.
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER
 EIA-540J000
 ROHS 2 COMPLIANT

MOUNTING INSTRUCTION:

USE 4-40 MACHINE SCREWS OR EYELETS.
 ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title 8 "D" CELL HOLDER WITH 6" WIRE LEADS		
Fractional ± .8 (.030)		Date 03/31/17	Drawing Number BH28DW
Angular ± 3°			