
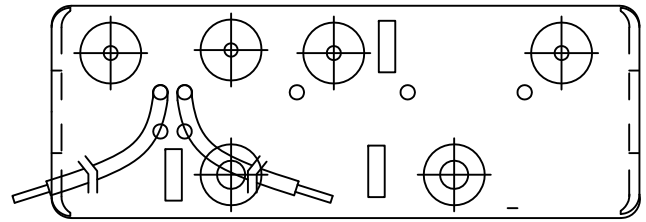
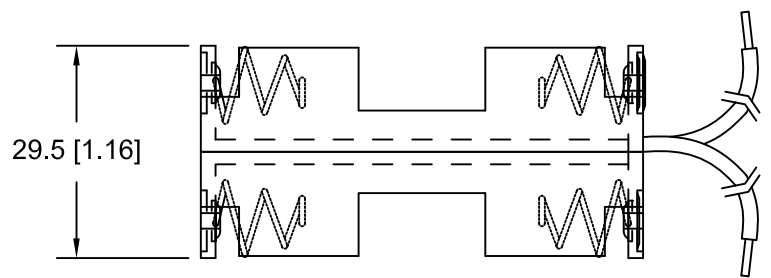



| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|----------|-----|--|------|------|-----|
| 11/26/05 | A | ADDED "ROHS COMPLIANT" | T.B. | B.S. | |
| 8/06/10 | B | REDRAWN IN AUTOCAD AND UPDATED SPECIFICATION | T.B. | B.S. | |
| 10/31/14 | C | UPDATED TO ROHS 2 COMPLIANT | T.B. | B.S. | |
| 06/16/17 | D | DIM. 150.0 WAS 152.4 DIM. 5.0 WAS 3.18 | T.B. | B.S. | |
| 06/27/17 | E | UPDATED SIDEVIEW | T.B. | B.S. | |

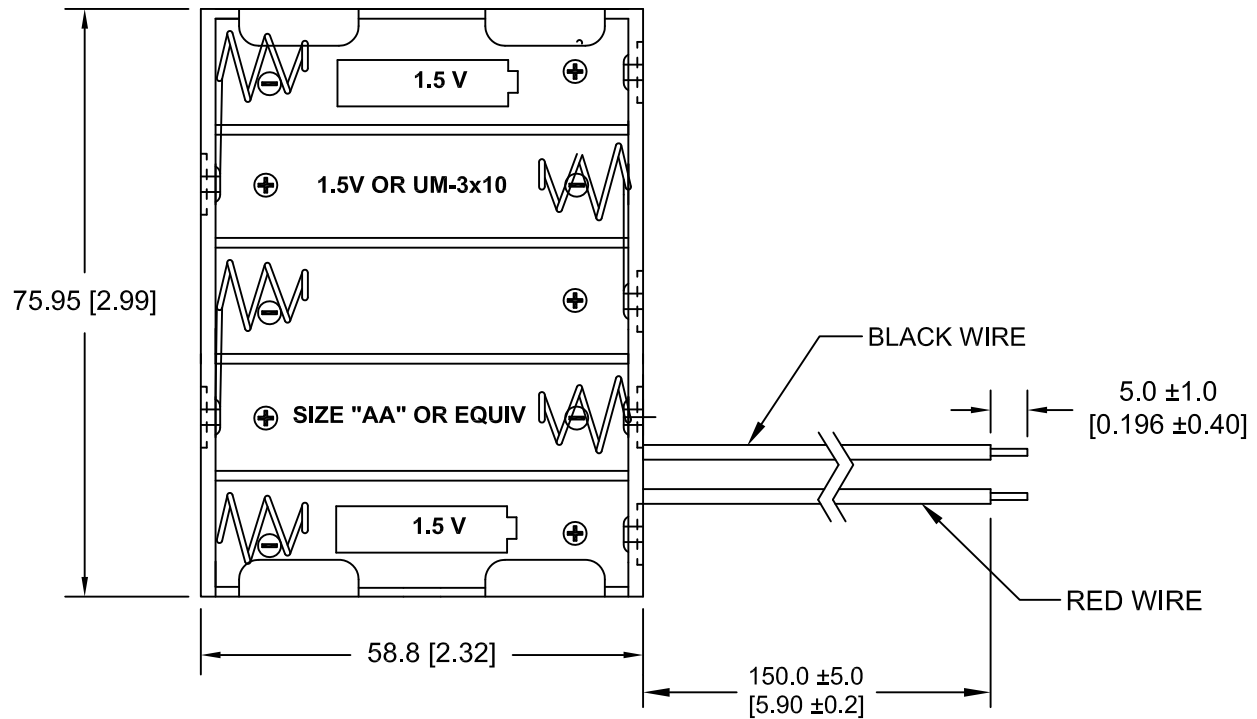

MATERIAL:
 HOUSING: POLYPROPYLENE, BLACK
 FLAMMABILITY RATING -UL94 HB, UL FILE NO. E216959
 TEMPERATURE RANGE: -10°C to +100°C
 SPRINGS: SPRING STEEL, NICKEL PLATED
 RIVETS: BRASS, NICKEL PLATED
 WIRES: 26AWG, UL1007, CSA-TR-64, 300V, 80°C
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS
 PER EIA-540J000
 ROHS 2 COMPLIANT

| | | | |
|--------------------------|---|----------------------------|--|
| Tolerance (Inches) |  Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 | | |
| Decimal ±.5 (.020) | Scale | Drawn By B.S. | |
| Fractional ±.8 (.030) | Title TEN "AA" CELL HOLDER WITH WIRE LEADS | | |
| Angular ± 3° | Date 06/27/17 | Drawing Number BH310AAW | |
| | | Approved By T.B. | |