



Date	SYM	REVISION RECORD	AUTH	DR.	CK.

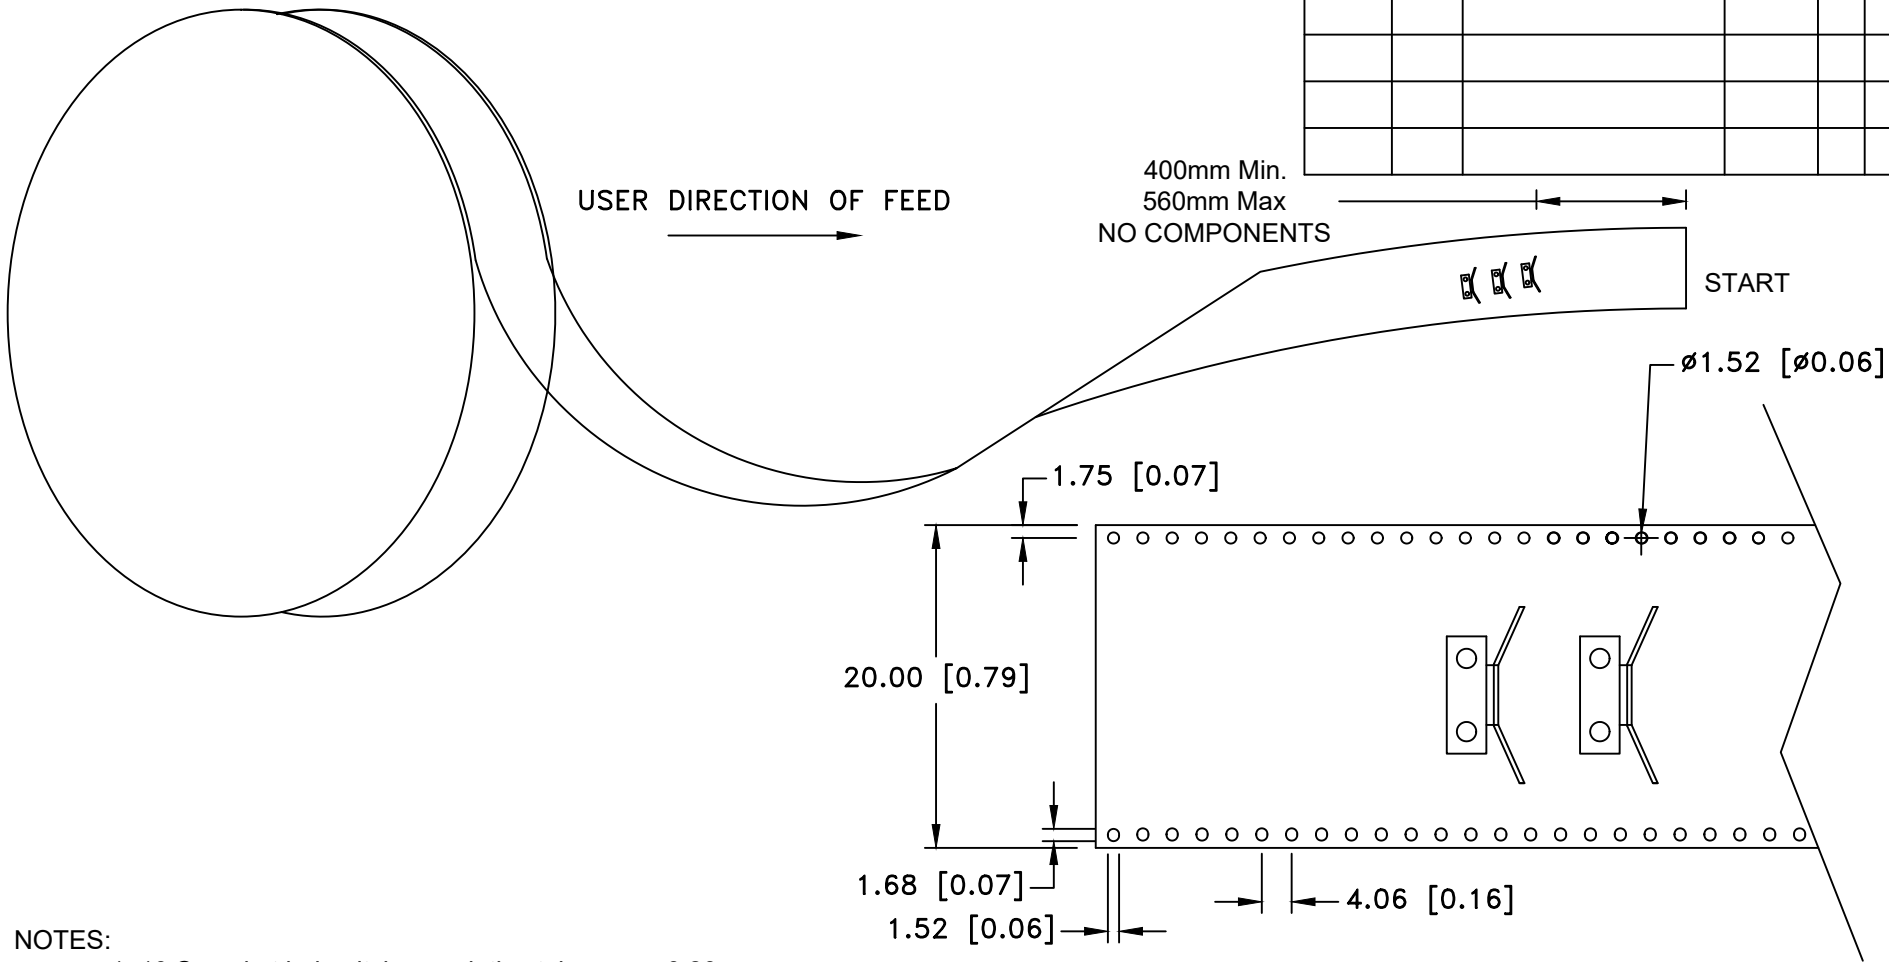

NOTES:

1. 10 Sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$
2. Carrier camber not to exceed 1mm in 250mm
3. Material: Anti-static 10 PS, Color: Clarity
4. Thickness: $0.50 \pm 0.05\text{mm}$
5. Component loader per 13" reel: 4,000 pcs
6. All dimensions per EIA-481-C

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal $\pm .5$ (.020)	Scale	Drawn By B.S.	
Fractional $\pm .8$ (.030)	Approved By T.B.		
Angular $\pm 3^\circ$	Date 08/18/2023	Title TAPE AND REEL SPECIFICATION FOR SURFACE MOUNT BATTERY CLIP FOR BK-120 Drawing Number BK-120-TR-99	