



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
07/22/22	A	Removed "Negative" and "Positive" markings. Removed circles from top	T.B.	B.S.	

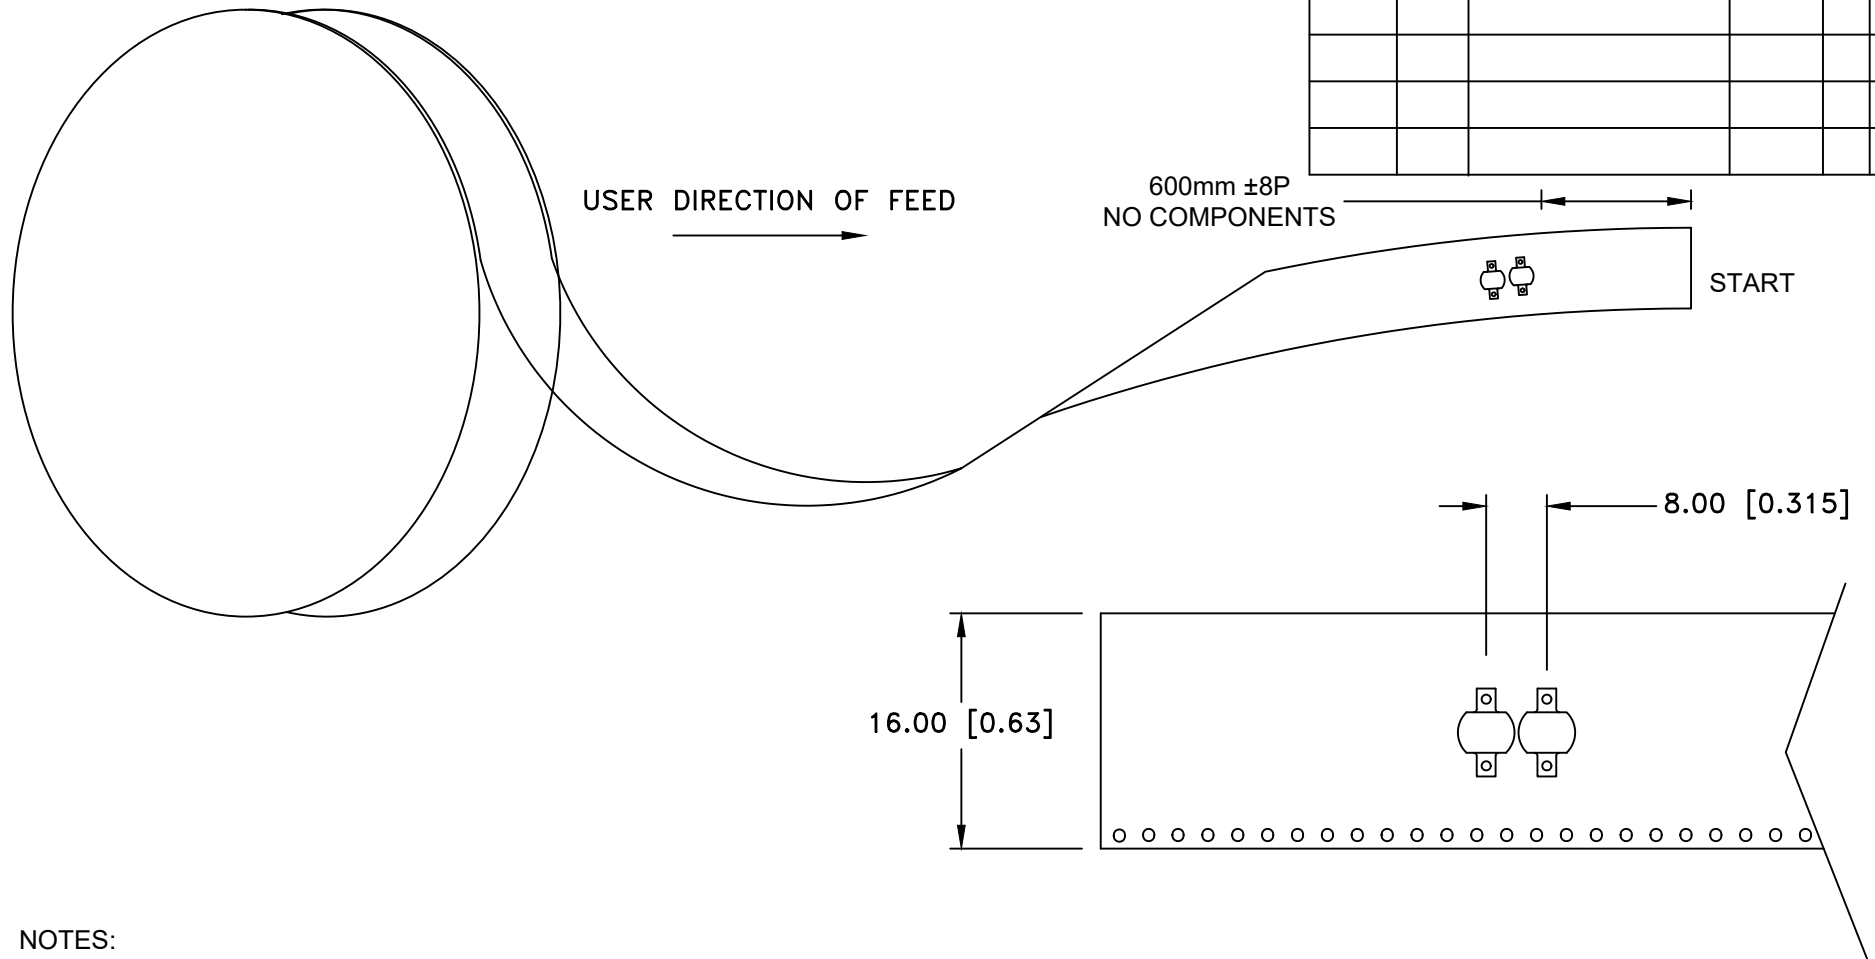

- NOTES:
1. 10 Sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$
 2. Carrier camber not to exceed 1mm in 100mm
 3. Material: Transparent Anti-static Polystyrene
 4. Thickness: $0.35 \pm 0.05\text{mm}$
 5. Component loader per 13" reel: 7500pcs
 6. All dimensions per EIA-481-2A

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal $\pm .5$ (.020)		Scale	Drawn By B.S.
			Approved By T.B.
Fractional $\pm .8$ (.030)	Title TAPE AND REEL SPECIFICATION FOR SURFACE MOUNT BATTERY HOLDER FOR BK-2982		
Angular $\pm 3^\circ$	Date 07/22/22	Drawing Number BK-2982-TR-99	