



| Date     | SYM | REVISION RECORD    | AUTH | DR.  | CK. |
|----------|-----|--------------------|------|------|-----|
| 05/05/17 | C   | DIM. .677 WAS .589 | T.B. | B.S. |     |
| 05/12/17 | D   | UPDATED TITLE      | T.B. | B.S. |     |
|          |     |                    |      |      |     |

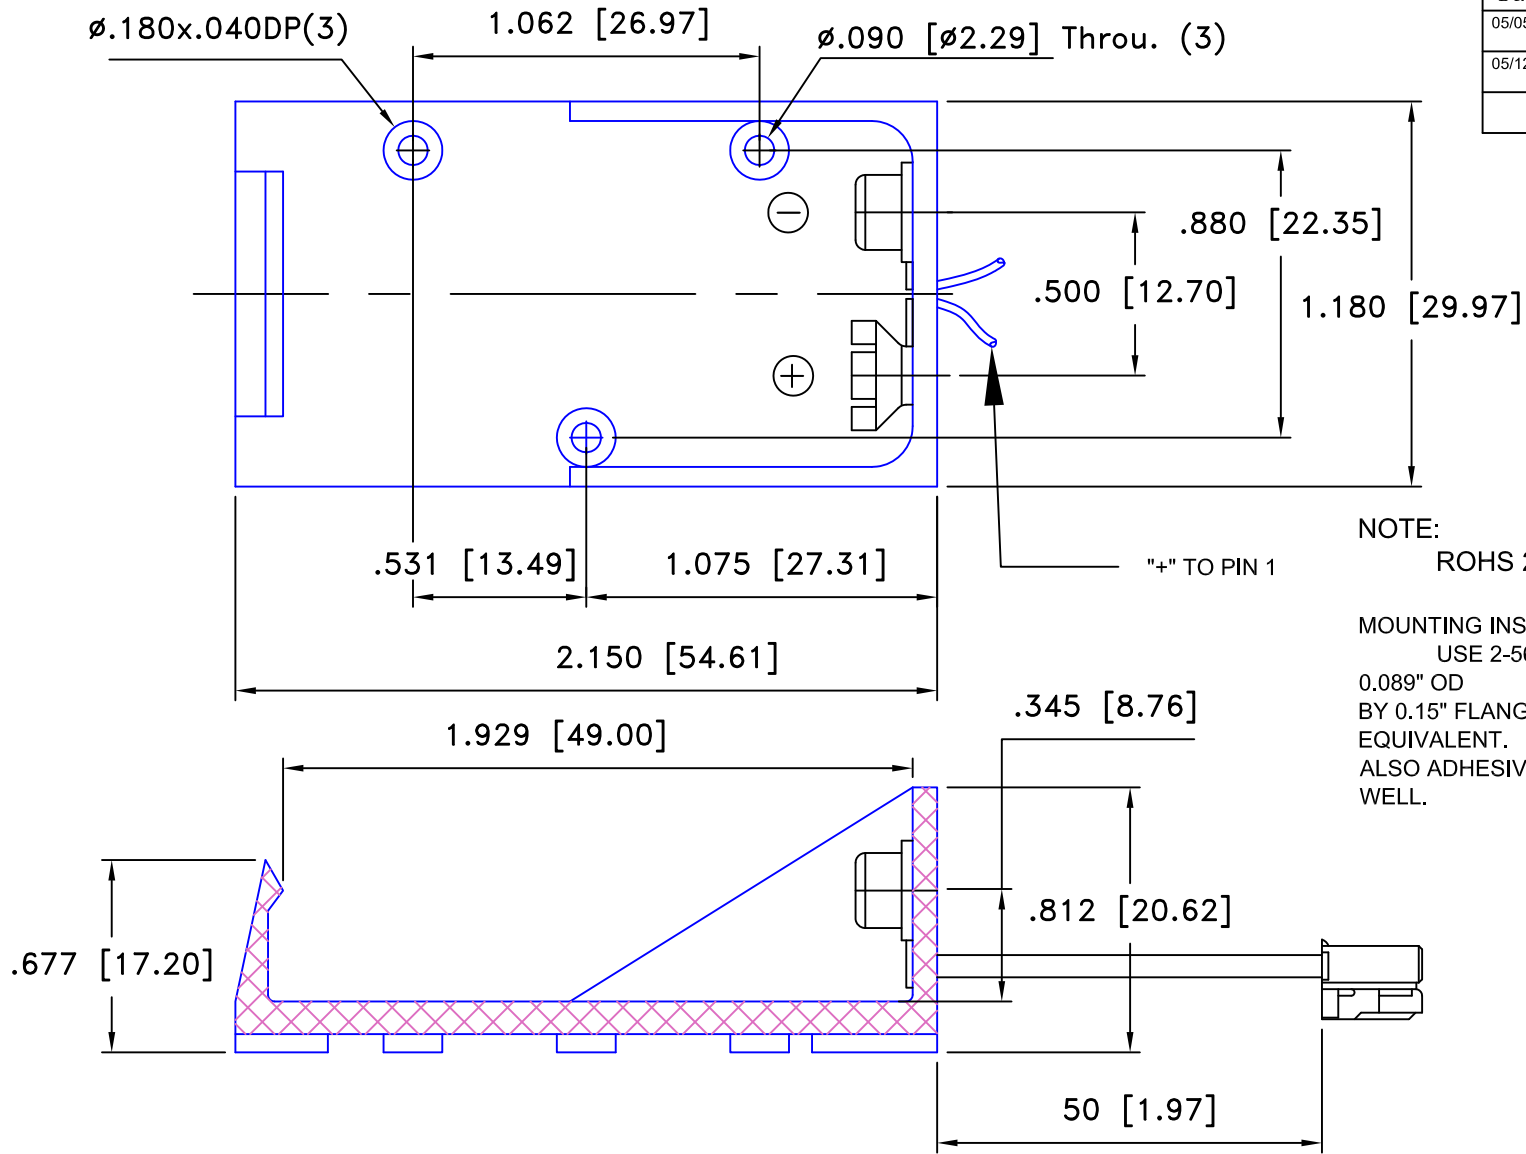

NOTE:  
ROHS 2 COMPLIANT

MOUNTING INSTRUCTION:  
USE 2-56 MACHINE SCREWS OR EYELETS  
0.089" OD  
BY 0.15" FLANGE STIMPSON GS-3 SERIES OR  
EQUIVALENT.  
ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK  
WELL.

|                                |  |   |                |               |
|--------------------------------|--|---|----------------|---------------|
| Tolerance<br>(Except as noted) |  |  <b>Memory Protection Devices, Inc</b><br>200 Broad Hollow Road, Farmingdale, New York 11735 | Scale          |               |
| decimal<br>±.5 (.020)          |  |   | 2=1            | Drawn By T.S. |
| Fractional<br>± .8 (.030)      |  | Title 9 VOLT BATTERY HOLDER WITH<br>6" WIRE LEADS/CONNECTOR   |                |               |
| Angular<br>± 3°                |  | Date  | Drawing Number |               |
|                                |  | 05/05/17  | BK-6172        |               |

| PART      | DESCRIPTION                         | MATERIAL                       |
|-----------|-------------------------------------|--------------------------------|
| CONTACTS  | JWT CONTACTS A2008TOP-2 OR EQUIV.   | PHOSPHOR BRONZE, TIN PLATED    |
| CONNECTOR | JWT CONNECTOR A2008H00-NP OR EQUIV. | NYLON 66 UL 94V-0              |
| CONTACTS  | BRASS SNAPS                         | NICKEL PLATED BRASS            |
| WASHER    | INSULATOR                           | RUBBER                         |
| HOLDER    | HOLDER UL94V-0, FILE No. E56070(S)  | HIGH IMPACT ABS BLACK, UL94V-0 |
| WIRE      | PVC COATED HOOK UP WIRE             | 24 AWG, UL1430, 105°C, 300V    |