



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
05/12/21	A	Dim. 24.0 WAS 28.0 Reel quantity was 450	T.B.	B.S.	

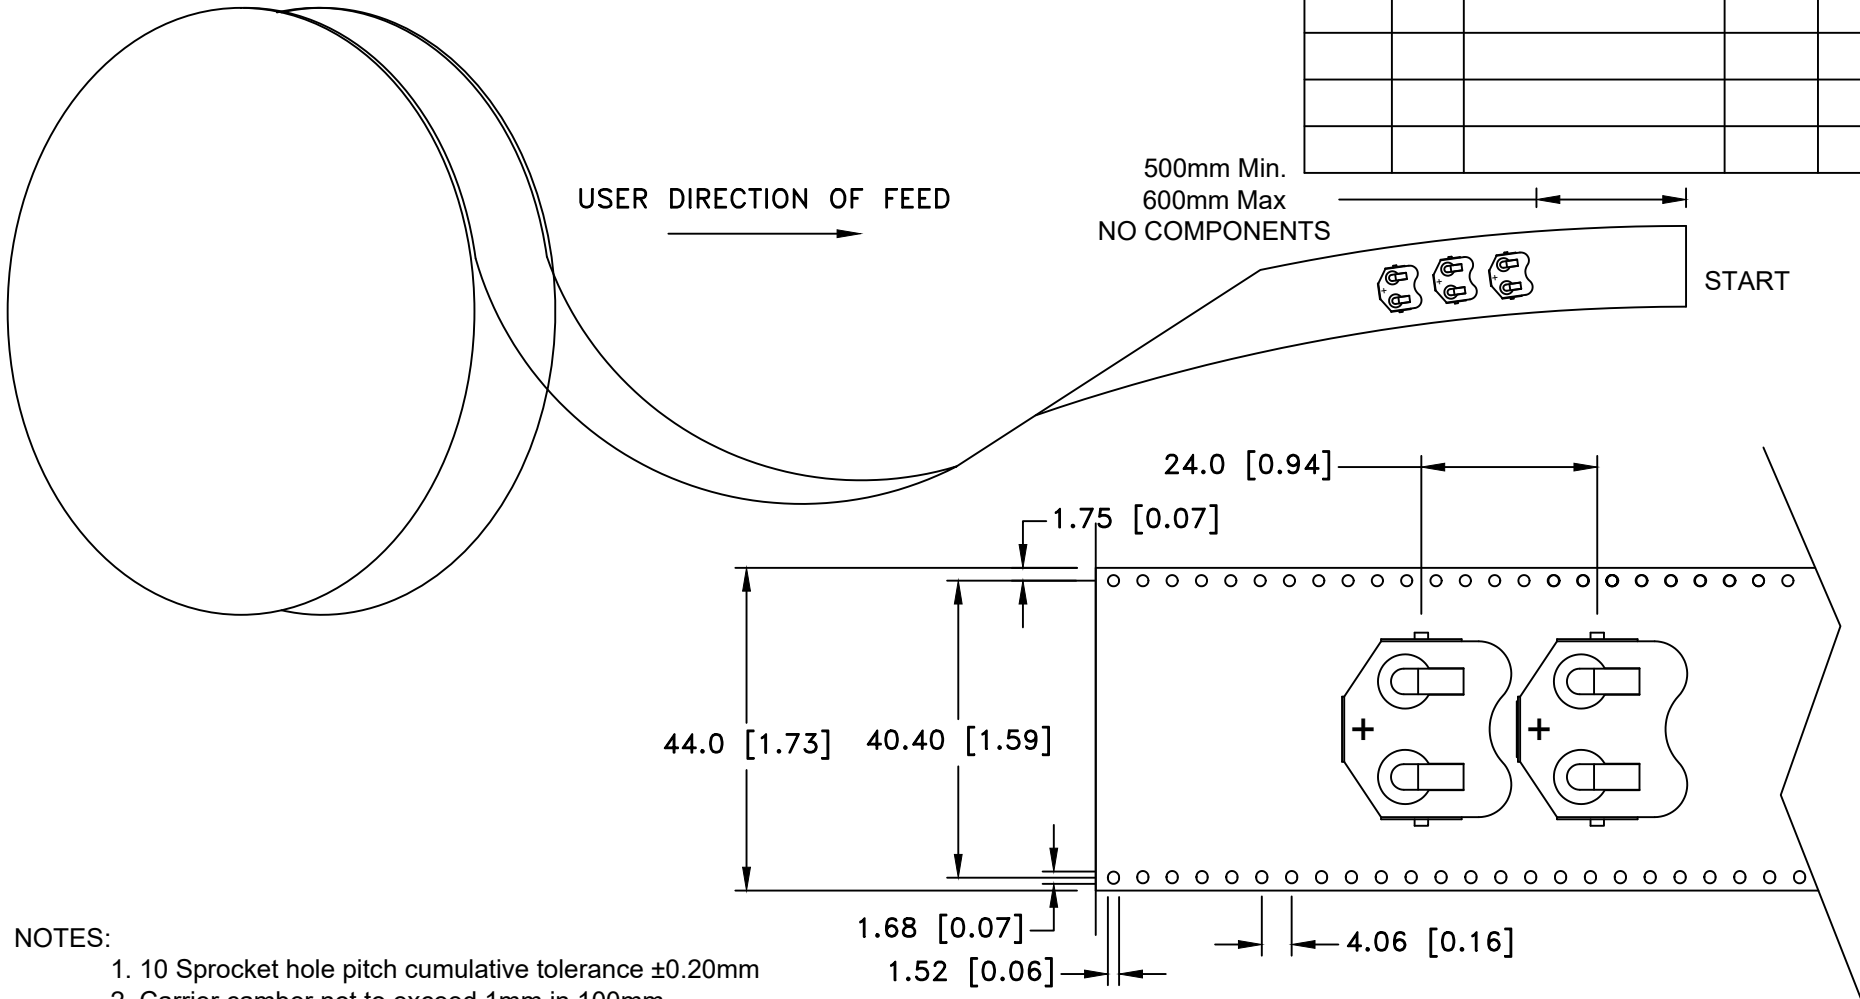

**NOTES:**

1. 10 Sprocket hole pitch cumulative tolerance  $\pm 0.20$ mm
2. Carrier camber not to exceed 1mm in 100mm
3. Material: Black Conductive Polystyrene
4. Thickness:  $0.5 \pm 0.05$ mm
5. Component loader per 13" reel: 350 pcs
6. All dimensions per EIA-481-C

ROHS COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal	Scale	Drawn By B.S.
$\pm .5$ (.020)			Approved By T.B.
Fractional	Title TAPE AND REEL SPECIFICATION FOR SURFACE MOUNT BATTERY HOLDER FOR BK-888		
$\pm .8$ (.030)	Date	Drawing Number	
Angular	05/12/21	BK-888-G-TR	
$\pm 3^\circ$			