



Date	SYM	REVISION RECORD	AUTH	DR.	CK.

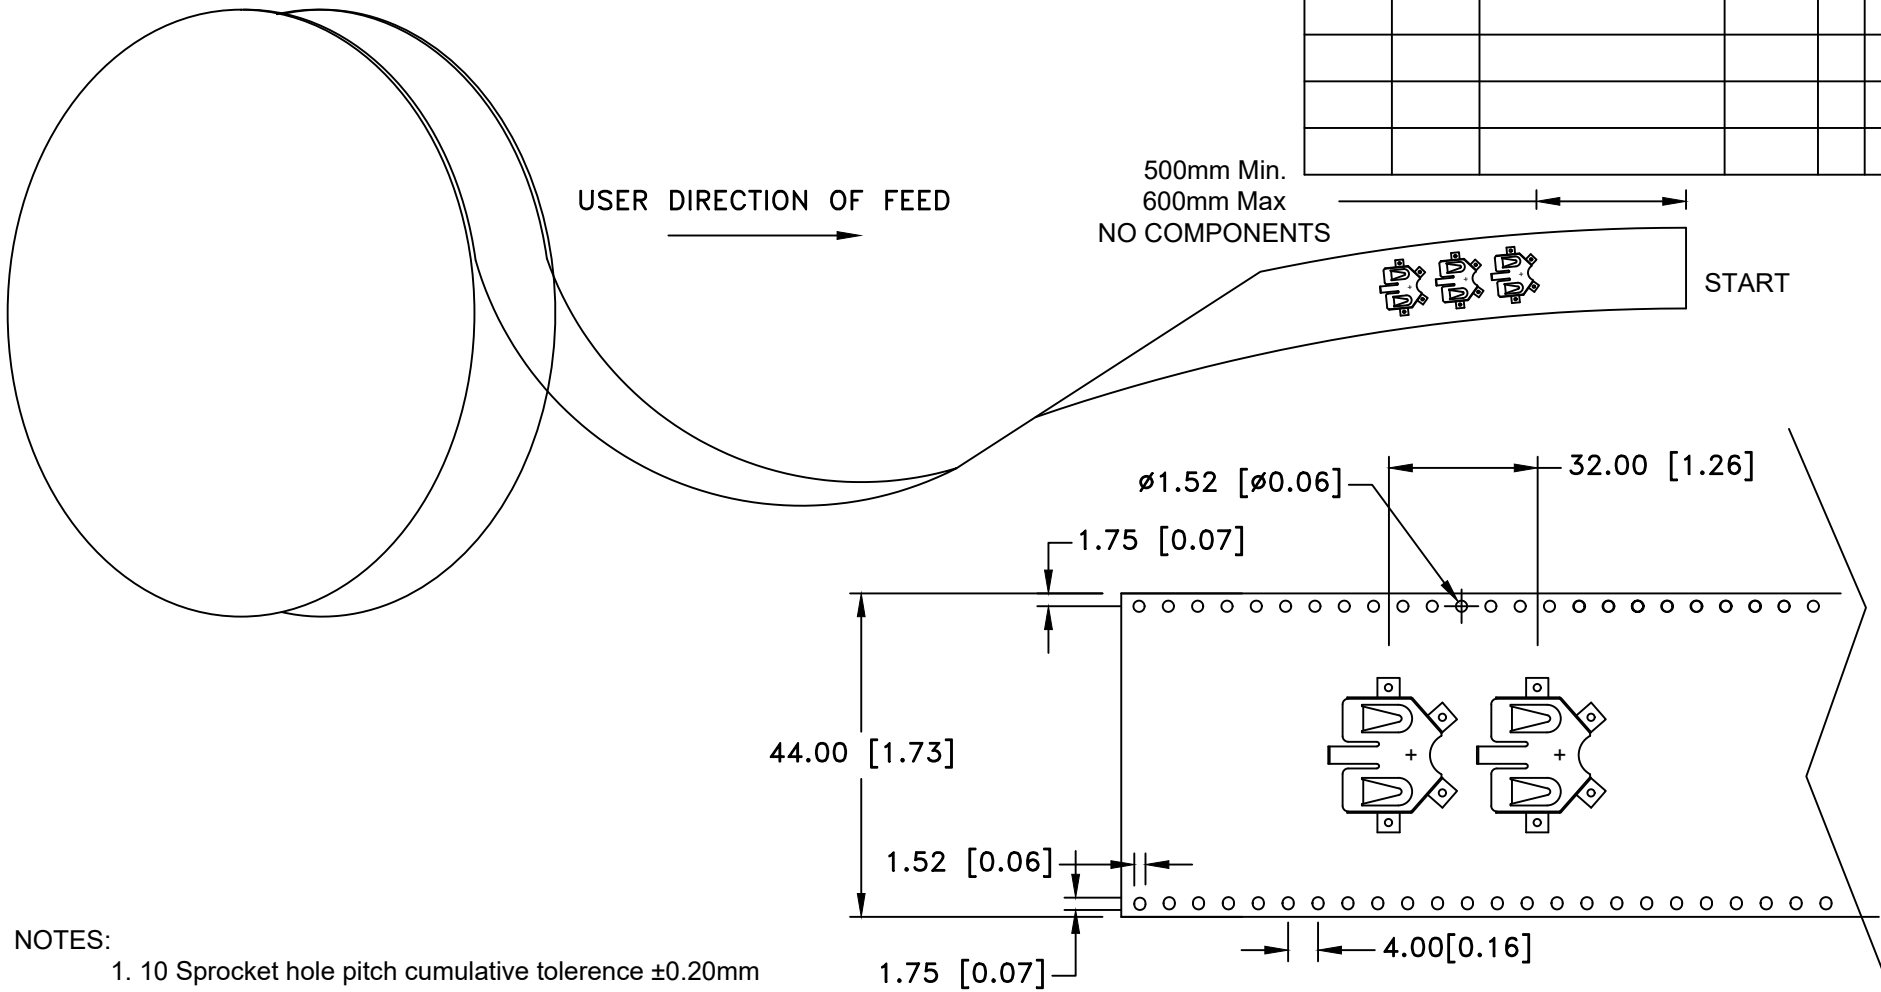

**NOTES:**

1. 10 Sprocket hole pitch cumulative tolerance  $\pm 0.20\text{mm}$
2. Carrier camber not to exceed 1mm in 100mm
3. Material: Black Anti-static Polystyrene
4. Thickness:  $0.5 \pm 0.05\text{mm}$
5. Component loader per 13" reel: 500 pcs
6. All dimensions per EIA-481-C

ROHS COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal $\pm .5$ (.020)	Scale	Drawn By B.S. Approved By D.L.
Fractional $\pm .8$ (.030)	Title TAPE AND REEL SPECIFICATION FOR SURFACE MOUNT BATTERY HOLDER FOR BK-912-FH-4-TR		
Angular $\pm 3^\circ$	Date 06/21/24	Drawing Number BK-912-FH-4-TR-99	