
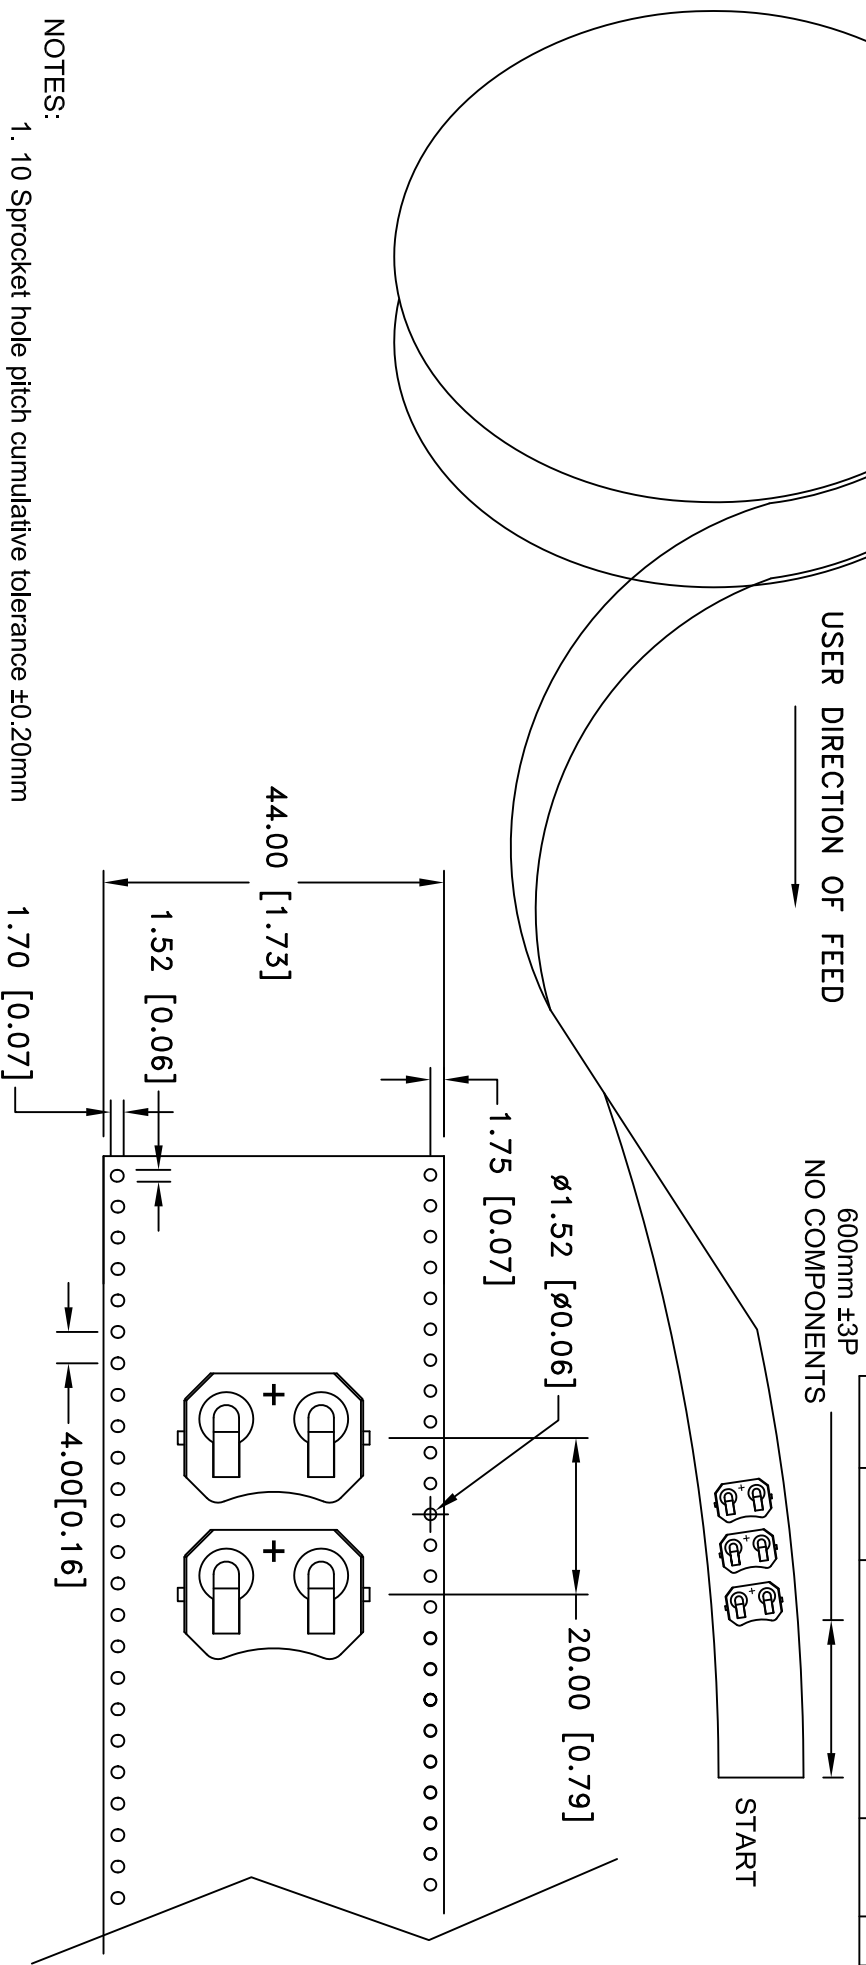


Date	SYM	REVISION RECORD	AUTH	DR. CK.

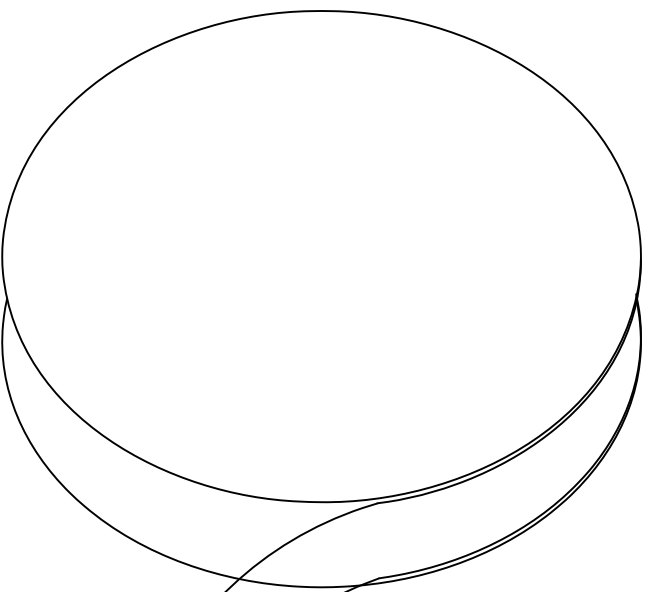

- NOTES:
1. 10 Sprocket hole pitch cumulative tolerance  $\pm 0.20\text{mm}$
  2. Carrier camber not to exceed 1mm in 100mm
  3. Material: Black Anti-static Polystyrene
  4. Thickness:  $0.5 \pm 0.05\text{mm}$
  5. Component loader per 13" reel: 400 Pcs.
  6. All dimensions per EIA-481-C

Tolerance (Except as noted)		MPD Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	
decimal	$\pm .5$ (.020)	Scale	Drawn By B.S. Approved By T.B.
Fractional	$\pm .8$ (.030)	Title TAPE AND REEL SPECIFICATION FOR SURFACE MOUNT BATTERY HOLDER FOR BK-913	
Angular	$\pm 3^\circ$	Date	Drawing Number
		04/14/21	BK-913-TR-LG-99