



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
6/24/06	A	UPDATED TITLE BLOCK	T.B.	B.S.	
3/11/16	B	UPDATED BATTERY HOLDER SKETCH	T.B.	B.S.	

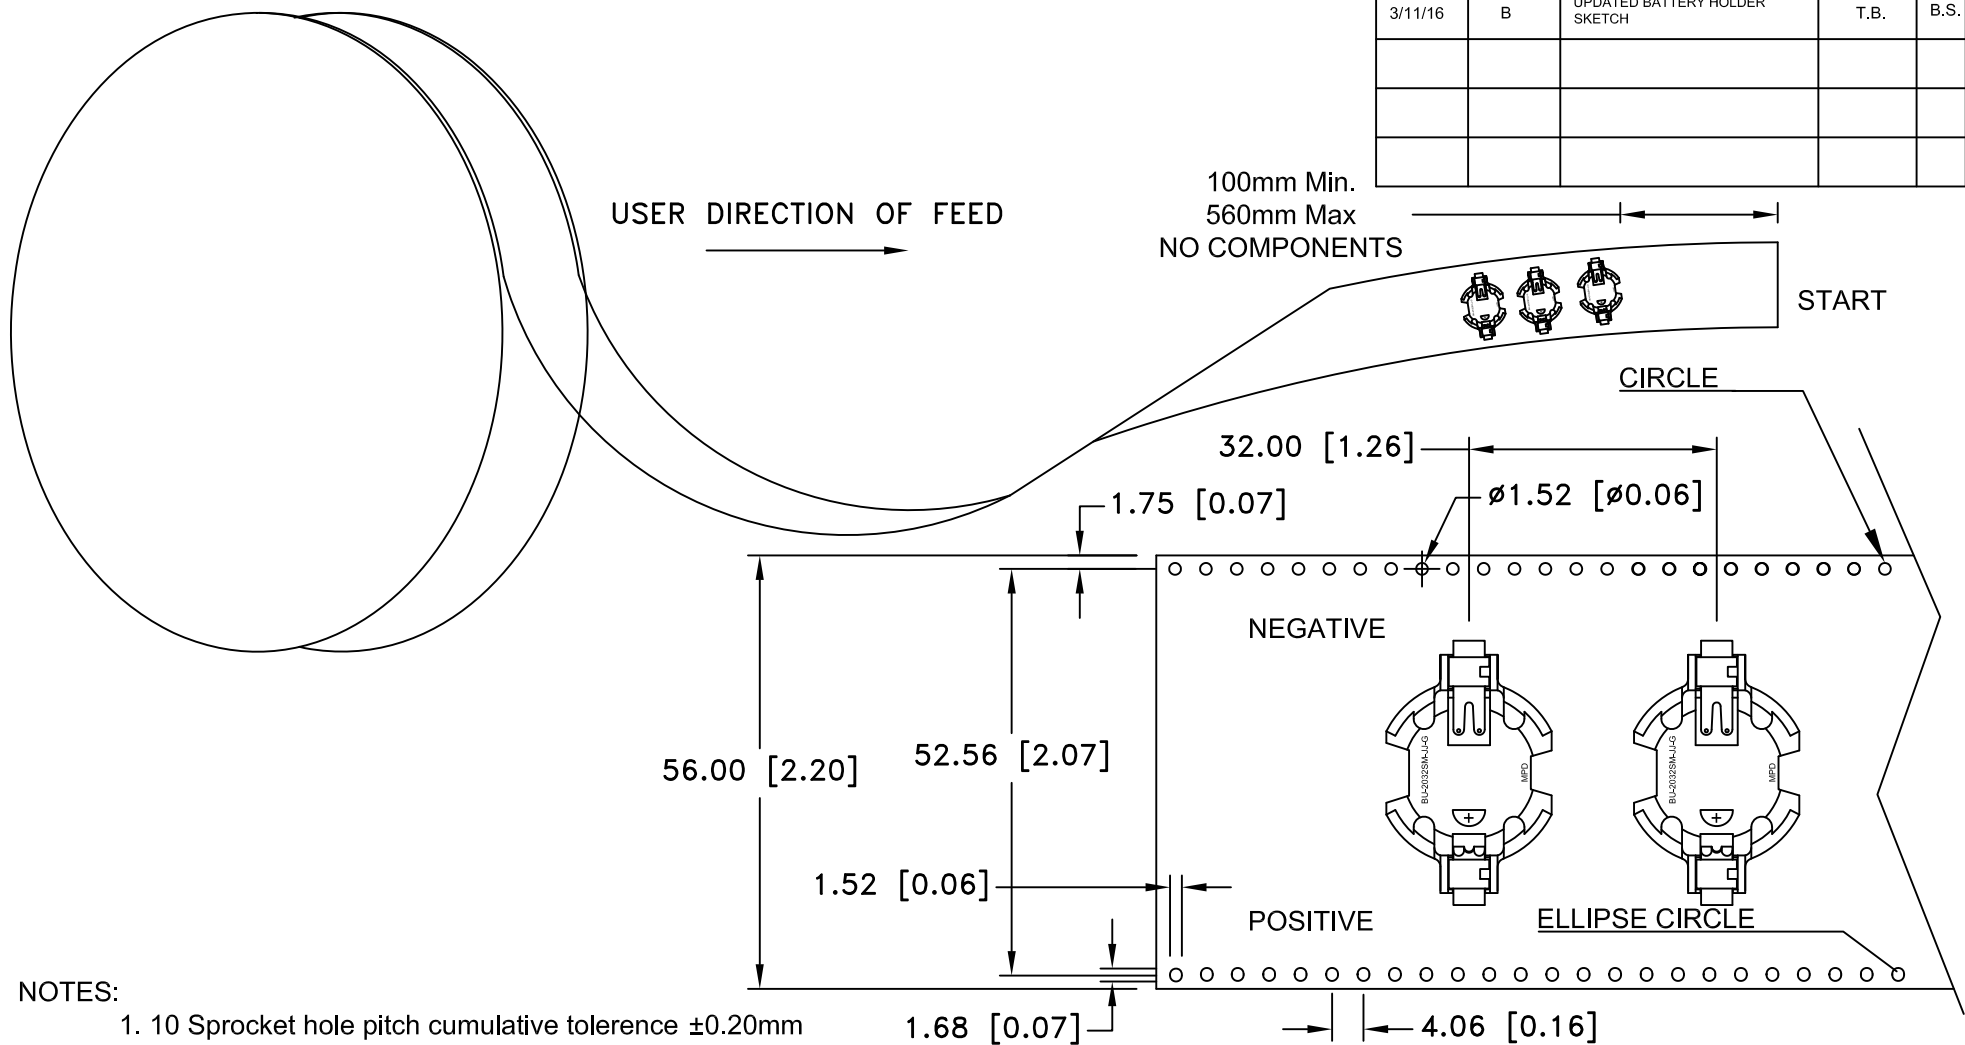

- NOTES:
1. 10 Sprocket hole pitch cumulative tolerance  $\pm 0.20\text{mm}$
  2. Carrier camber not to exceed 1mm in 250mm
  3. Material: Transparent Anti-static Polystyrene
  4. Thickness:  $0.35 \pm 0.05\text{mm}$
  5. Component loader per 13" reel: 400 pcs
  6. All dimensions per EIA-481-2A

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal $\pm .5$ (.020)	Scale	Drawn By B.S. Approved By T.B.
Fractional $\pm .8$ (.030)	Title TAPE AND REEL SPECIFICATION FOR P/N BU2032SM-JJ-GTR		
Angular $\pm 3^\circ$	Date 3/11/16	Drawing Number BU2032SM-JJ-GTR-99	